

GENEL TOLERANSLAR
A
DIN 7168-m

OLCU
TOL.

>0-6
±0.1

>6-30
±0.2

>30-120
±0.3






>120-315
±0.5

>315-1000
±0.8

>1000-2000
±1.2

REVISIONS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	İLK ÜRETİM	22.07.2016	

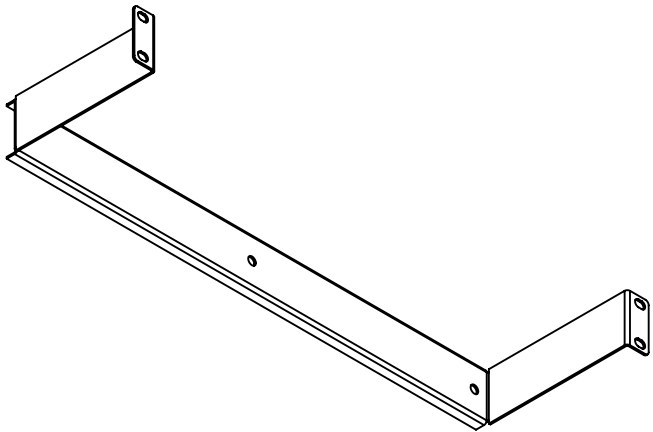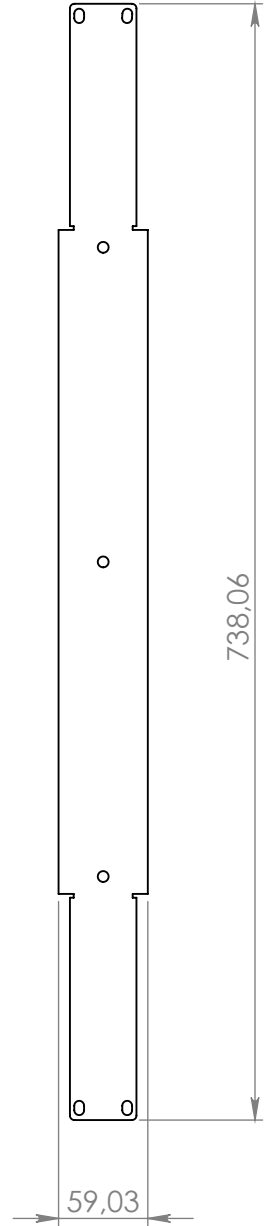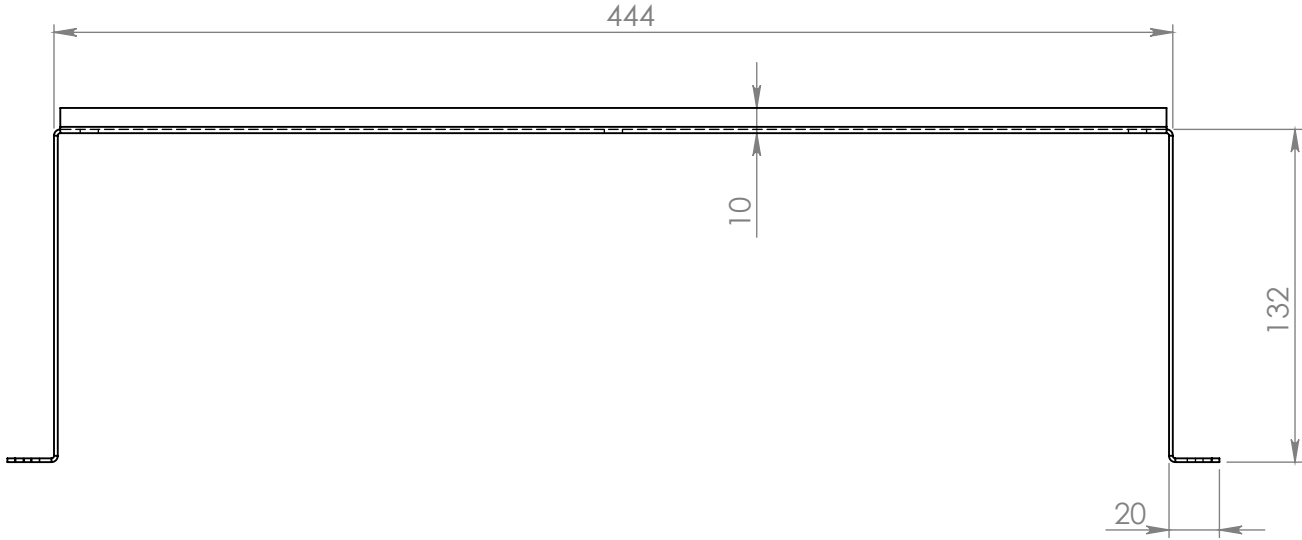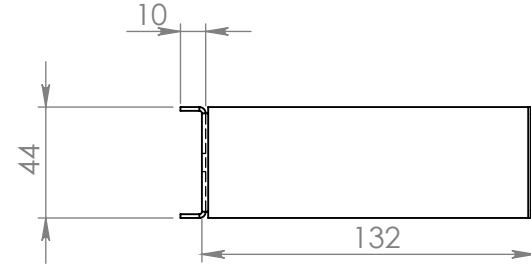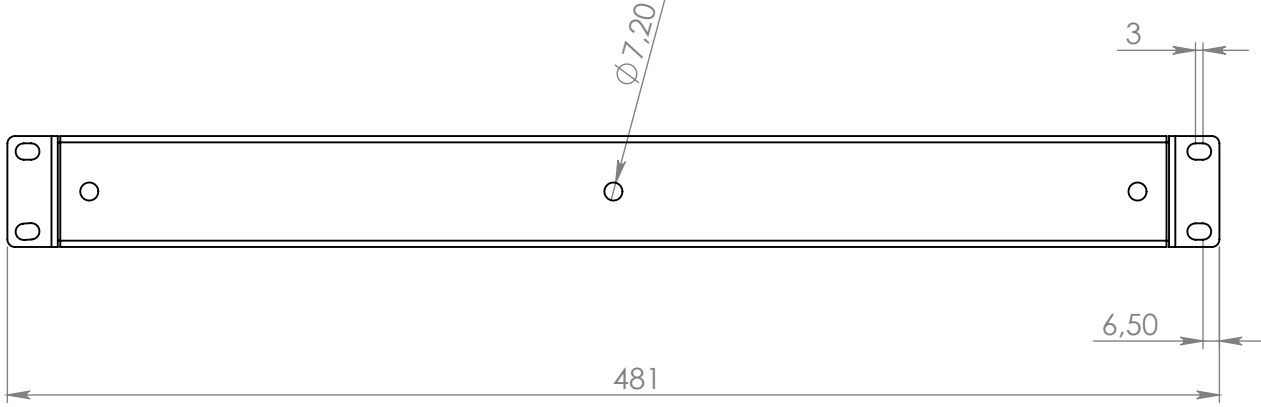

KOD TABLOSU			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS Surface finish: µ				FINISH: TOZ BOYA		KESKİN KENAR VE ÇAPAK OLMAYACAKTIR		CANOVATE®			
BOYA	B	RAL 7035	G	Linear : DIN 7168-m				TITLE: 19" 1U C-RAİL GÖVDESİ SACI						
		RAL 9005	N	Angular : DIN 7168-m Hole : DIN 7168-m										
MONTAJ	M	RAL 7035	Q	DRAWN	TANJU BAHADIR	SIGNATURE	DATE	22 Temmuz 2016 Cuma 14:50:47	DWG NO. 001351P00				A3	
				MFG										MATERIAL: DKP
				CHK'D					Surface Area : 80580.55 m²	SCALE:1:5				SHEET 1 OF 1
				RAL 9005	S	Q.A								