



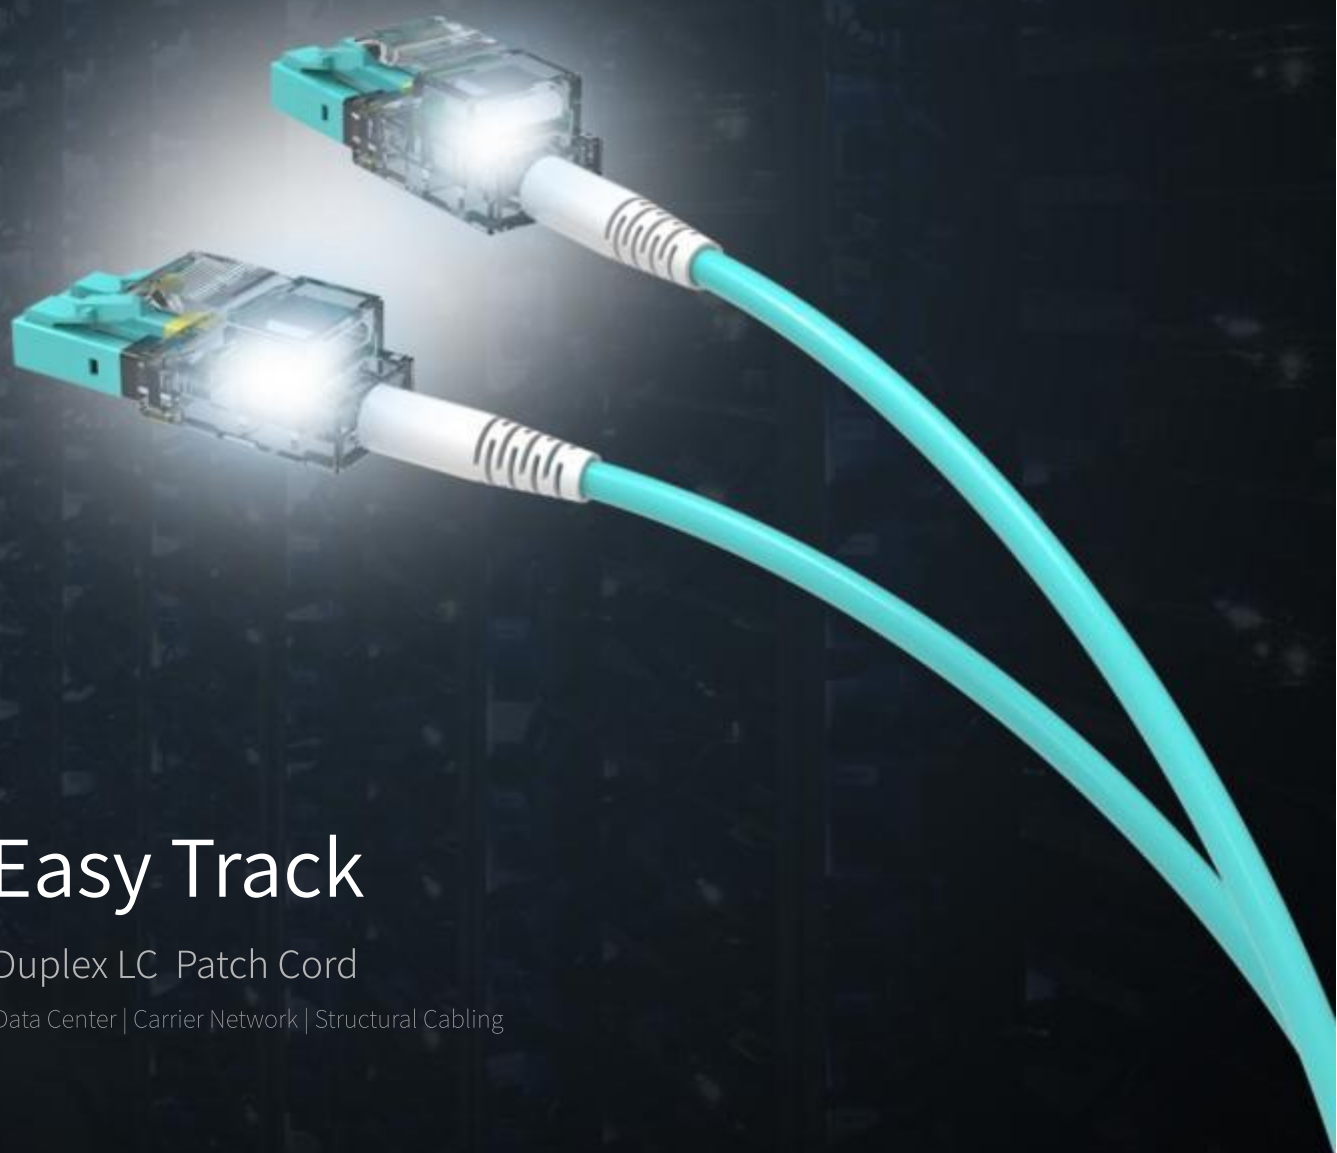

Easy Track

Duplex LC Patch Cord

Data Center | Carrier Network | Structural Cabling

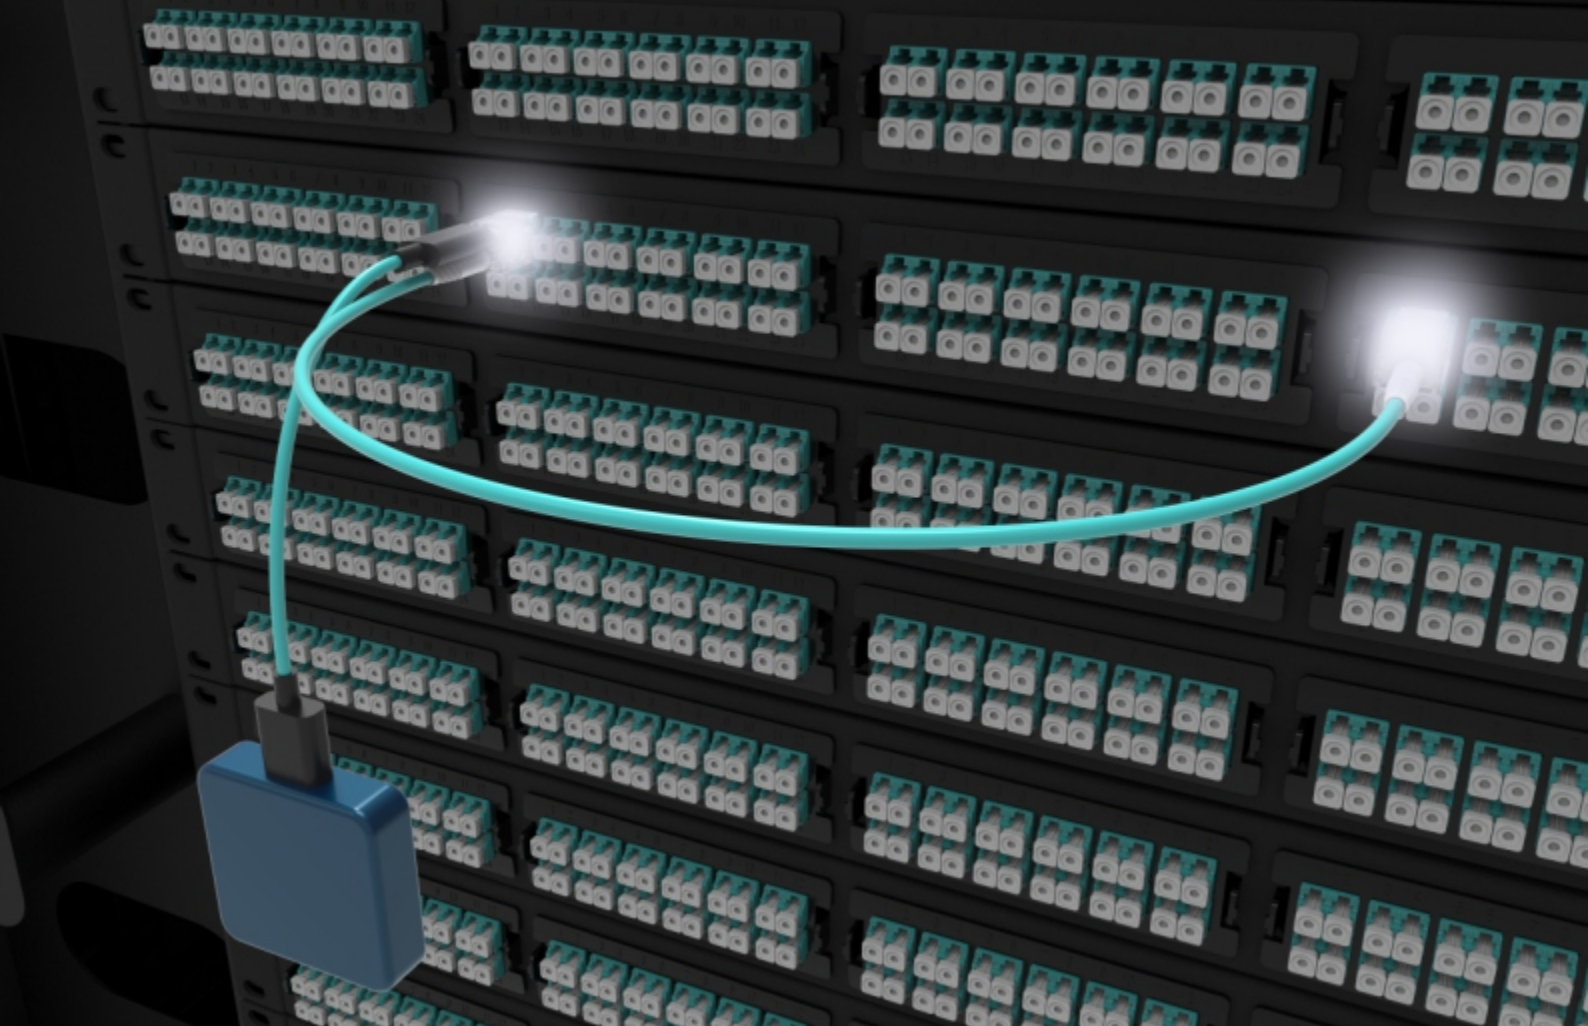

When you face the intricate jungle of fiber jumpers

Spend 60 minutes to find out

the right end from hundreds connectors?

or

Easily

Lighten up the ET-DLC

Quickly find the right end

Lighten up ET-DLC

Only Need



Cell Phone (with OTG)



Power Bank



Phone Charger



Laptop

No built-in Battery All-line Environmental


Environmental plastic/PCB material Meets ROHS

Quick Supply Safe Reliable

Any LVPS handheld device can directly connect to Micro USB interface

Plug & Play Easily lighten up

Unlimited Lighten up times

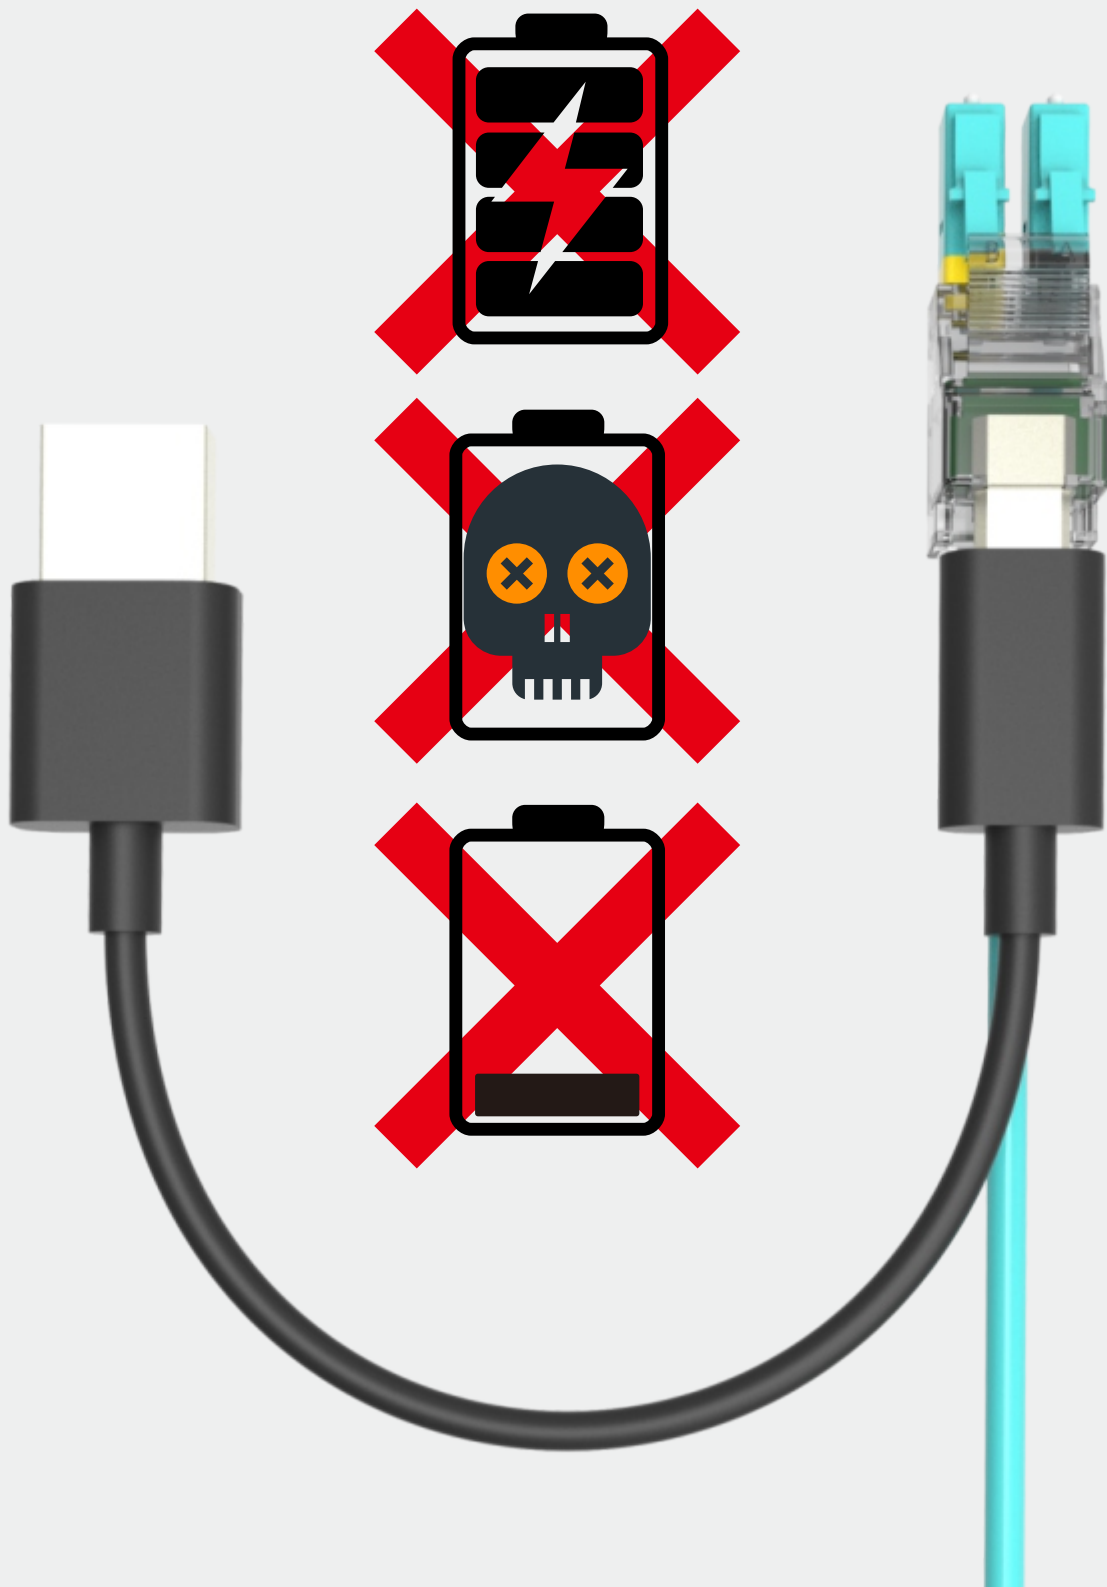


INSTRUCTION

- Just a data cable with microusb on one end and a mobile power supply, plug and play.
- After power is supplied to either end of the connector, the connectors at both ends will be on at the same time. Find the link quickly.
- It is recommended to press and hold DLC connector when plugging microusb. Online plugging does not affect link performance.
- Vertical tensile resistance of jumper $\geq 70\text{N}$.
- Materials meet ROHS requirements.
- Product executive standard: IEC 61754-20 / IEC 60332-1 / IEC 61034
- Optical performance:
 - SM Max.IL $\leq 0.3\text{dB}$ Max.RL $\leq -50\text{dB}$ (UPC) Max.RL $\leq -60\text{dB}$ (APC)
 - MM Max.IL $\leq 0.3\text{dB}$ Max.RL $\leq -30\text{dB}$

Fiber/Electric Composite Cable


- Duplex tight buffered fiber
- LSZH sheath
- 3.0mm single tube round cable




0.54mm copper wireX2, sheath red/black

0.6mm sub-cableX2, sheath yellow/white, OM3 (other fiber make to order)

Kevlar

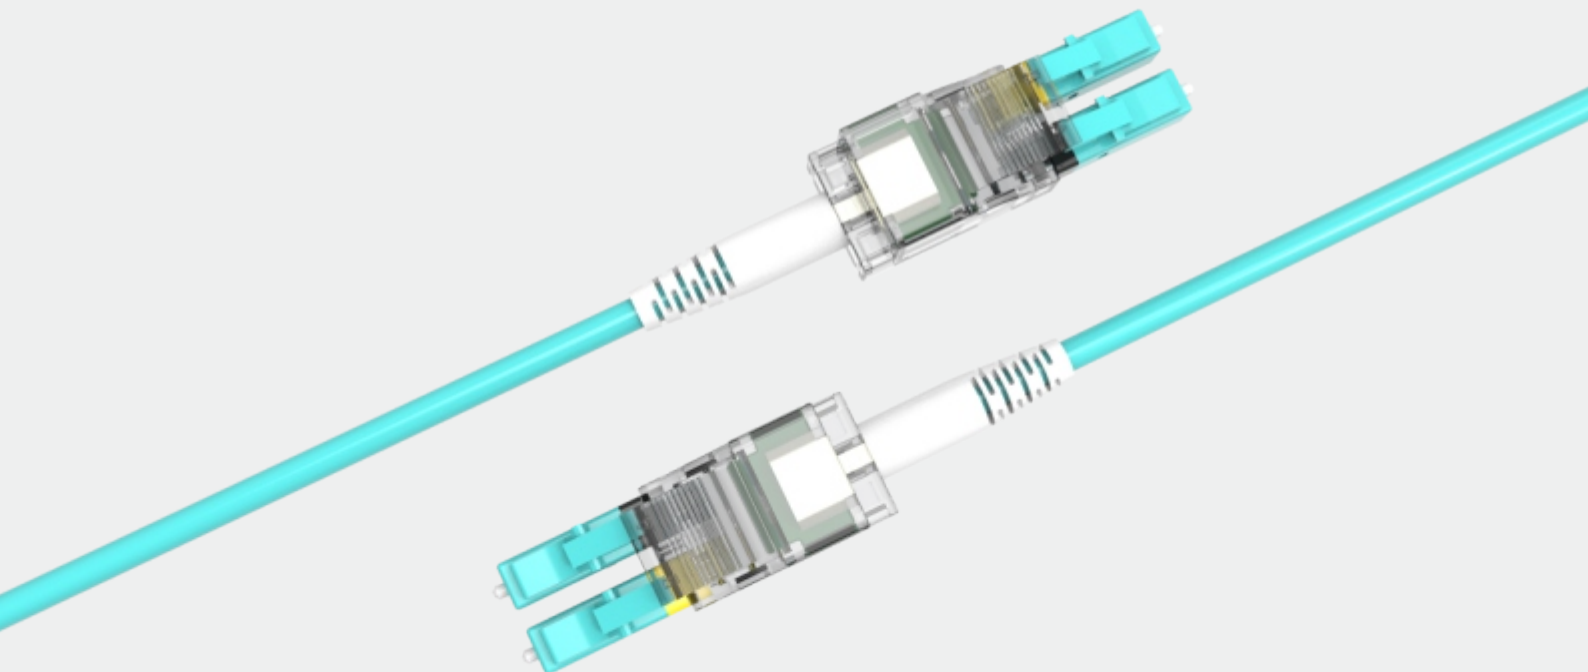

Order Information

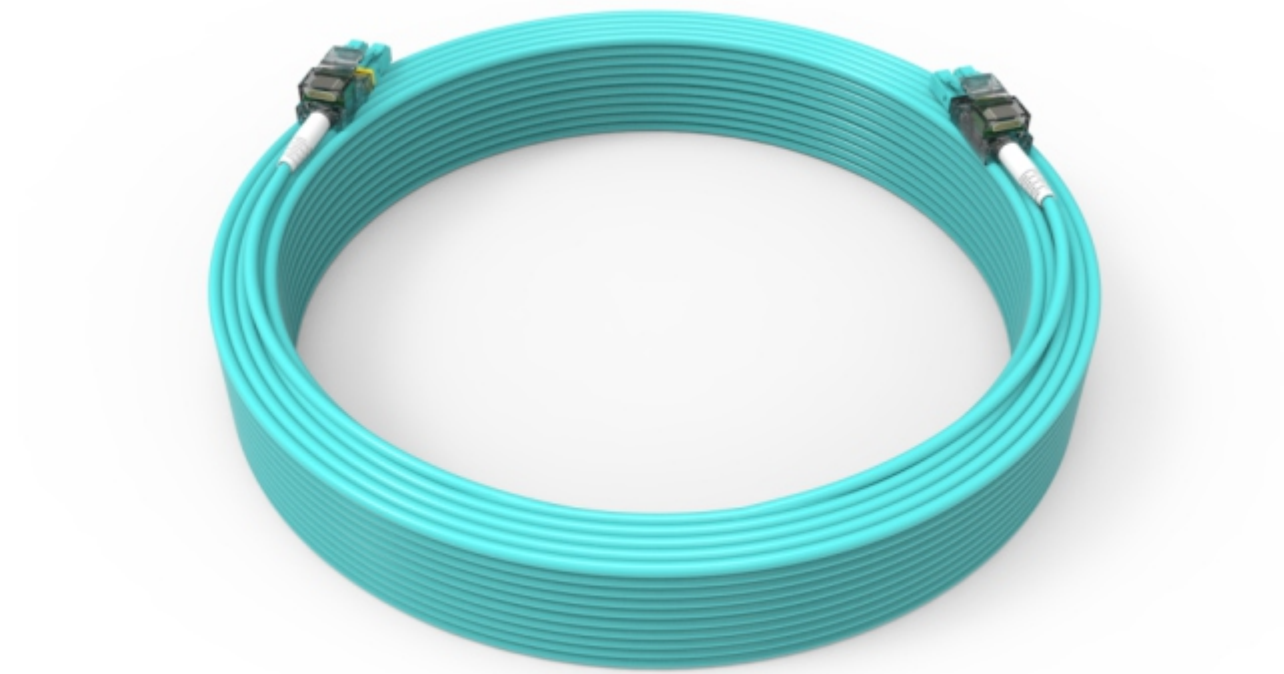

Connector	Fiber	Cable	Length	Boot
LC/PC-DUP-ET	G652.D	Duplex - 3.0mm - LSZH - Single Tube - Round	3m	OTRANS
	G657A1		5m	no LOGO
	G657A2		10m	order LOGO
	OM2		Customize	
	OM3			
	OM4			
	OM5			

* Note: Customized LOGO for boot, Connector MOQ: ≥10000nos.

This product has obtained Chinese invention patent.

